
Needle-valve stopcock, straight

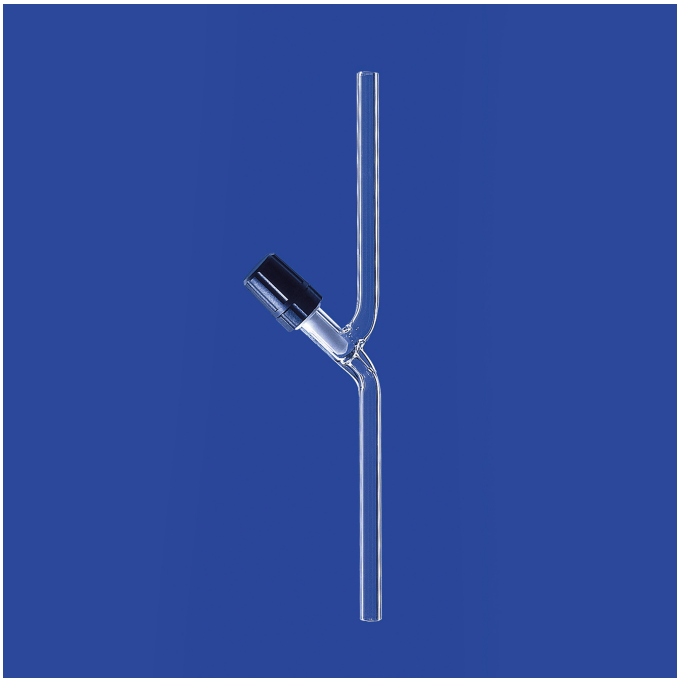

Needle-valve stopcock, straight

Smooth operating spindle made of PTFE, valve bore: 0-2,5 mm, with retaining device to avoid complete unscrewing, screw cap and retaining device made of PP, operating temperature: -20 to +150 °C, made of DURAN® tubing, pack: 1 pc., Cat. No.: 2 2700 02

Generated on 2026-11-17