


Needle-valve stopcock, straight



Needle-valve stopcock, straight

Smooth operating spindle
made of PTFE, valve bore:
0-2,5 mm, with retaining
device to avoid complete
unscrewing, screw cap and
retaining device made of PP,
operating temperature:
-20 to +150 °C, made of
DURAN® tubing, pack: 1 pc.,
Cat. No.: 2 2700 02

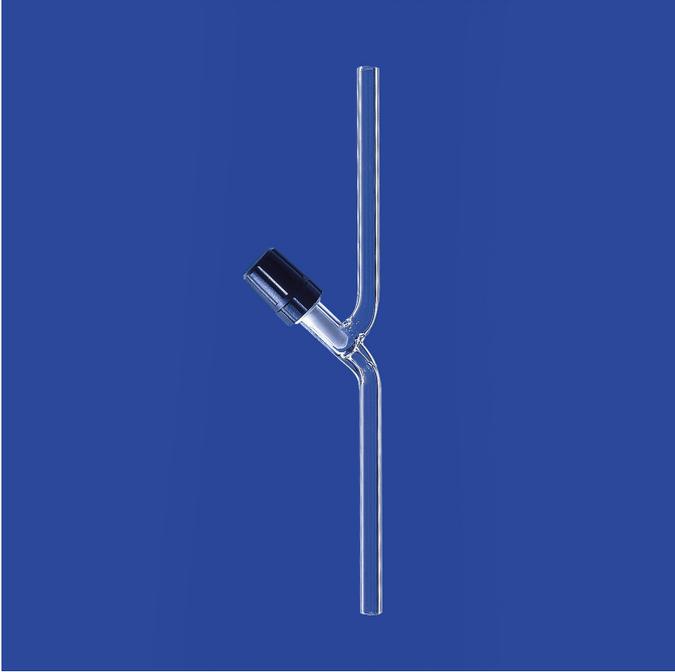