


## Stopcocks, straight bore, with solid glass plug

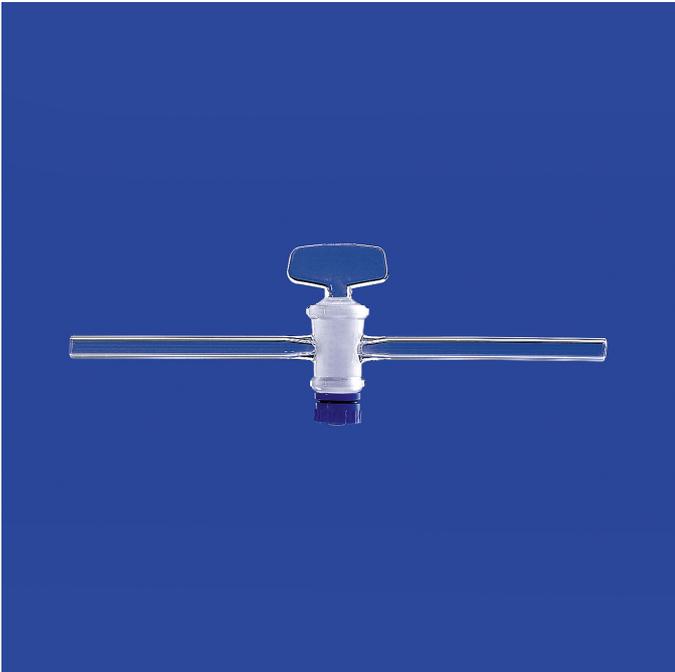

Stopcocks, straight bore, with solid glass plug

Acc. to DIN 12541-1 and in addition to DIN standard, with solid glass plug and screwthread retaining device, one straight bore, material: borosilicate glass 3.3, leakage rate acc. to DIN 12540-1

Stopcock (NS)	Bore (mm)	Acc. to DIN	Pack (qty.)	Cat. No.
12,5	1,5	DIN 12541-1	10	2 1012 01
12,5	2,5	-	10	2 1012 02
14,5	2,5	DIN 12541-1	10	2 1014 02
14,5	4,0	-	10	2 1014 04
18,8	4,0	DIN 12541-1	1	2 1018 04
18,8	6,0	-	1	2 1018 06
21,5	6,0	DIN 12541-1	1	2 1021 06
24	8,0	-	1	2 1024 08
29,2	10,0	DIN 12541-1	1	2 1029 10
12,5*	1,5 cap	DIN 12541-1	10	2 2212 01
14,5*	2,5 cap	DIN 12541-1	10	2 2214 02

\* with capillary side arms