
Vacuum stopcocks, 1-way, right-angled

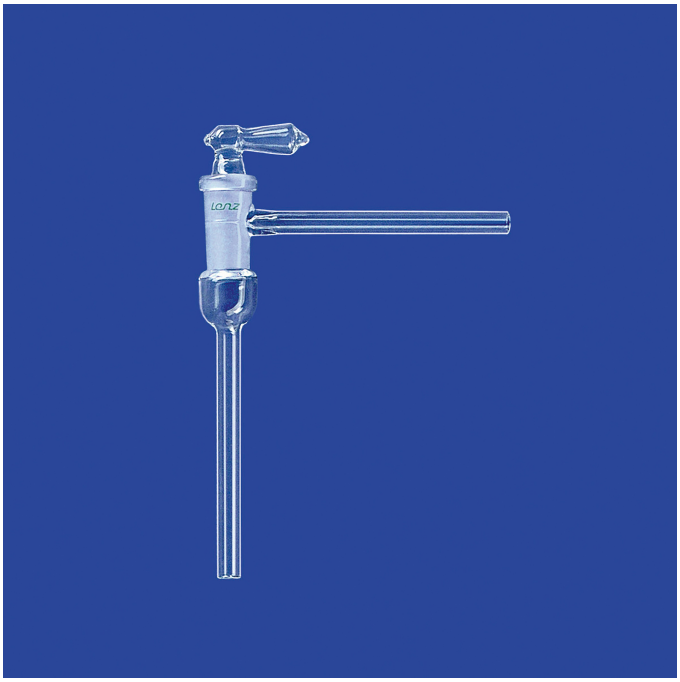

Vacuum stopcock, 1-way, right-angled

Acc. to DIN 12545 and in addition to DIN standard, with right-angled side arm and hollow glass plug, material: borosilicate glass 3.3, leakage rate to DIN 12540-1

Stopcock(NS)	Bore (mm)	Acc. to DIN	Pack (qty.)	Cat. No.
14,5	2,5	DIN 12545	1	2 9214 02
18,8	4,0	DIN 12545	1	2 9218 04
21,5	6,0	DIN 12545	1	2 9221 06
24	8,0	(1)	1	2 9224 08
29	10,0	DIN 12554	1	2 9229 10

(1) in addition to DIN standard

Generated on 2026-11-17